


ECO PHYSICS CLD 62 O_x

Application examples

- Compact design
- Internal ozone generator and scrubber
- Metal or steel converter for NO_x detection
- Four freely selectable measurement ranges
- Touch screen operation
- Mobile DC operation

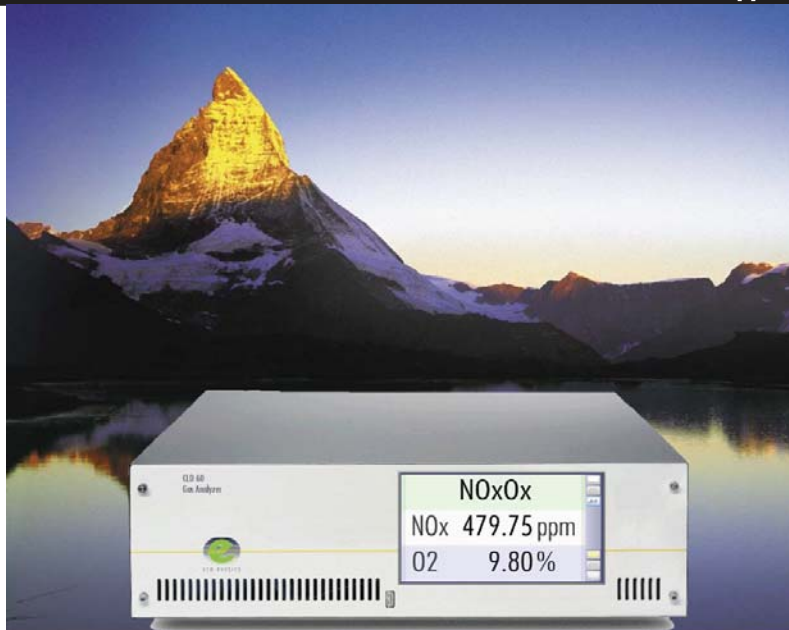

Stack emission measurement


Permanent NO_x and Oxygen monitoring

Surveillance of ship engines

Operation of boiler and burner

Gas turbine installations

Nitrogen oxide emissions need the oxygen content as reference. This is what the new analyzer CLD 62 O_x from ECO PHYSICS is made for: It measures both concentrations at once! Chemiluminescence and paramagnetic detectors - the standard reference methods.



Stack emissions.

We tell you what you can save.

Your emissions will become more of a burden when your air pollution regulation will opt for an increase of the NO_x tax. With this ECO PHYSICS monitor you will exactly know, what the cost will be. The analyzer is designed to measure the pollutant continuously, precise and reliable.

If your air pollution regulation requires reports on calibration history or status of the instrument, all information is readily available and stored.

Your instrument stores all the previous calibrations and it tracks all error and warning conditions.



Boiler and burner operation.

Economical solution

The CLD 62 O_x offers a two in one solution for series checks of NO_x and and oxygen in fixed or mobile stations. This analyzer is designed for all applications with an existing gas preconditioning unit to ensure quality control as well as keeping to threshold values.

Total NO_x is measured by steel or an optional metal converter.

User-friendliness

The development of an ECO PHYSICS analyzer always includes full user comfort. The user can adapt the operation according to his needs and applications by selection of predefined settings via touch screen or remotely from a PC.

Warning and error messages are displayed coded and in full text. The analyzer guides the user step by step to return to normal operation.

Maintenance simply means annual replacement of filters and membranes besides the consumables required by special sampling conditions.



MARPOL NO_x monitoring.

Easy calibration

Calibration is quickly and automatically carried out. This extremely useful feature eliminates the potential risk of erroneous calibrations.

Compact and modular design

The CLD 62 O_x is the most compact unit of its class. Thanks to the totally modular layout and integrated ozone generator and scrubber it is designed for a multitude of applications.

CLD 62 0x


Specifications

Measuring ranges	NO _x : four freely selectable ranges from 5 to 5000 ppm Oxygen: 0 - 25 %	Interface	RS 232, LAN
Min. detectable concentration	0.5 ppm	Analog output (optional)	4–20 mA into 500 Ω max.; 0–1 V; 0–10 V (for NO/NO _x only)
Noise at zero point (1 σ)	NO: 0.25 ppm Oxygen: 0.1 %	Dimensions	height: 133 mm (5 1/4") width: 430 mm (17") depth: 455 mm (18")
Lagtime	< 1 sec	Weight	16 kg (35 lb) without pump
Rise time (0–90%)	< 3 sec	Delivery includes	CLD 62 0x analyzer, external power supply, power cable, vacuum pump, operator's manual
Temperature range	10–40 °C	Standard	CLD 62 0x NO _x and oxygen analyzer steel converter, LAN
Humidity tolerance	5–95% rel. h (non-condensing, ambient air and sample gas)	Options	M Metal converter IO analog I/O interface (output for NO/NO _x only) DC 24 V operation incl. DC vacuum pump R rack mount slides F inlet filter
Sample flow rate	35 ml/min		
Input pressure	ambient		
Dry air use for O ₃ generator	internally generated (no external supply gas required)		
Power required	250 VA, external membrane pump 250 VA		
Supply voltage	100–230 V/50–60 Hz, external power supply		

Note: Noise at zero and detection limit depending on filter setting

ECO PHYSICS reserves the right to change these specifications without notice.

Flow diagram

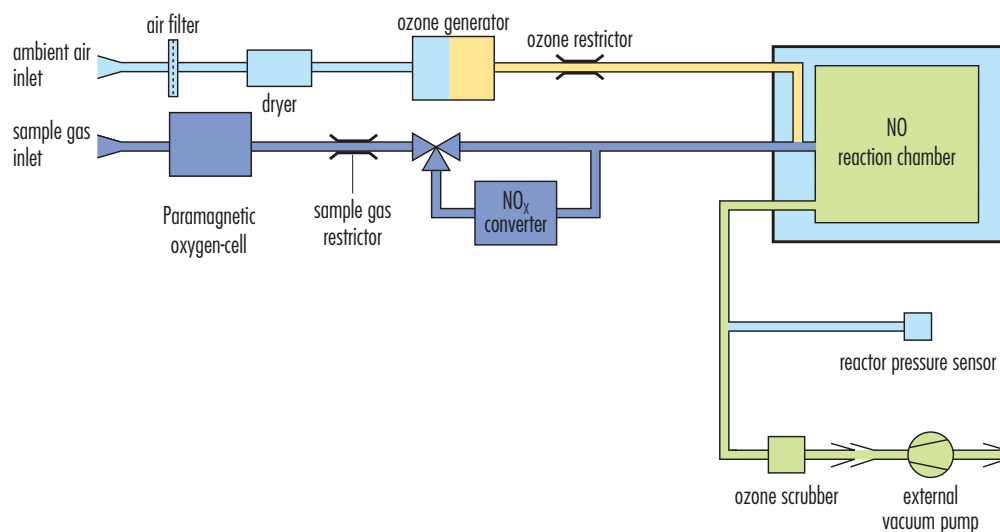

ECO PHYSICS

ECO PHYSICS AG · BUBIKONERSTRASSE 45 · CH-8635 DUERNTEN · TEL. +41 55 220 22 22 · FAX +41 55 220 22 55 · INFO@ECOPHYSICS.COM

WWW.ECOPHYSICS.COM